


Unipoint

Unipoint (AS760) Fingers utilise a solid riveted 2.5mm aluminium panel. The advantage of the panels over planks is that they can shaped and there is a high degree of flexibility in panel sizes.

KEY INFORMATION

- Standard finger dimensions; 762 x 165mm leaving a 750 x 165mm face to view
- Grub screw friction fit (supplied) with system
- Single finger per level

UNIpoint Single Level Fingers

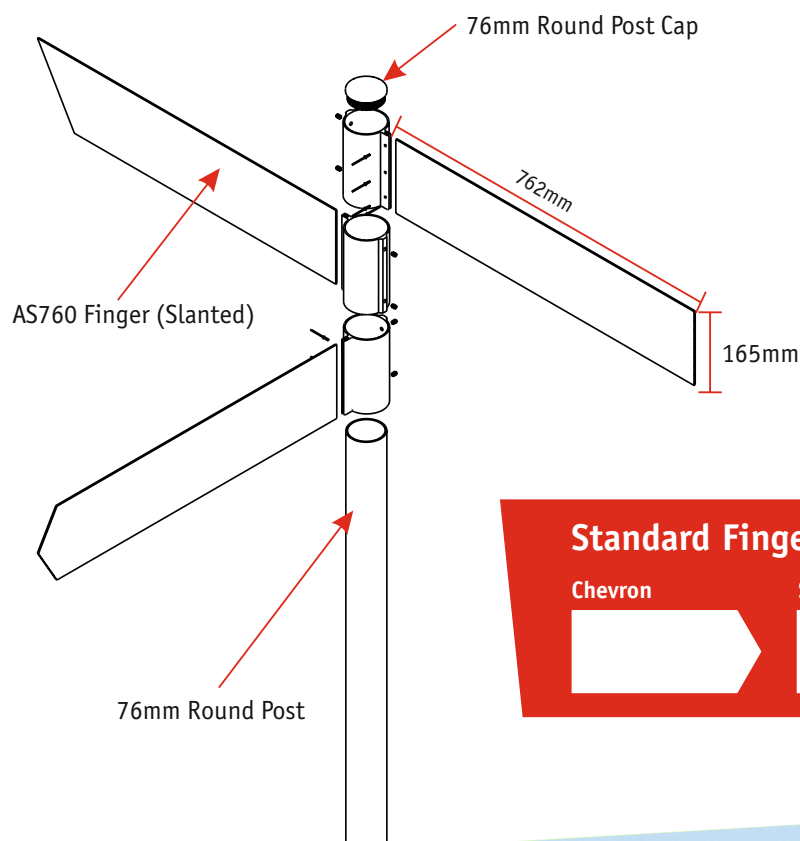

Mill Finish

Powder Coated to RAL or BS Colour

Shape	Finish
Chevron	Mill
Chevron	Powder Coated
Flat End	Mill
Flat End	Powder Coated
Rounded	Mill
Rounded	Powder Coated
Slanted	Mill
Slanted	Powder Coated

Standard Finger Shapes Options

Chevron



Slanted



Round



Flat End

